

# MODEL A335


## MANUAL SEALLESS STEEL STRAPPING TOOL

---



### Features

- High seal joint efficiency of 80% with the patented sealless joint technology
- Suitable for regular duty and high tensile steel strapping
- Can handle steel strapping up to a thickness of 0.58mm / .023"
- No loss of strap tension with the wheeling tensioning system
- Sealing mechanism is completely closed, preventing damage from dust and debris
- Cutting and sealing depths can be easily controlled with built in adjustment screws
- Wearing parts such as the feed wheel, die and cutter are easy to replace with common tools

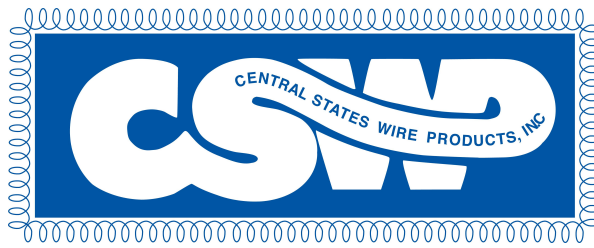

# MODEL A335

## MANUAL SEALLESS STEEL STRAPPING TOOL

### Standard Features

The A335 is an ideal tool for a wide range of vertical and horizontal strapping applications in all industrial sectors. The special tensioning system prevents even minor tension loss, making it ideal for products requiring high tension and seal strength.



The advanced sealing technology and the individual tool adjustment for specific strap thickness on the A335 provides better joint efficiency than tools using a separate seal. If strap tension is lost during storage or shipment the joint will not unlock.

### Types of Model A335

Item No.	Model	Strap Width		Strap Thickness	
		mm	inch	mm	inch
13.2770	A335/12.7/0.50-0.58	12.7	1/2	0.50-0.58	.020-.023
13.2790	A335/16/0.50-0.58	16.0	5/8	0.50-0.58	.020-.023
13.2810	A335/19/0.50-0.58	19.0	3/4	0.50-0.58	.020-.023

### Specifications

Dimensions:	Length:	610 mm – 24"
	Width:	102 mm – 4"
	Height:	127 mm – 5"
Weight:	Standard:	3.9 kg / 8.6 lbs.
	Torque Wrench:	4.3 kg / 9.5 lbs.
Suitable strapping:		12.7 - 20 mm / 1/2" - 3/4" wide 0.50 - 0.58 mm / .020 - .023" thick
Tension:		1100N (250 lbs) maximum individual adjustment (max. tension depends on strap quality)
Average sealing strength:		approx. 80% of strap breaking strength (dependent on strap quality)

### Accessories

Item No.	Description
A33.4101	Bolt for horizontal applications (in combination with grip ball N4.1116)
N4.1116	Grip Ball for horizontal applications (in combination with bolt A33.4101)
A33.0113	Suspension for vertical applications



A335-05/12-100448