


MODEL 482

PNEUMATIC PUSH TYPE COMBINATION STEEL STRAPPING TOOL

Features

- Ideal high performance strapping tool for metal products i.e. coils, loads of bars, pipes, bundles, rods and curved or irregularly shaped packages.
- The perfect double notch upcut joint is accomplished in a single operation.
- The low weight of the tool allows a mobile operation without any suspension system



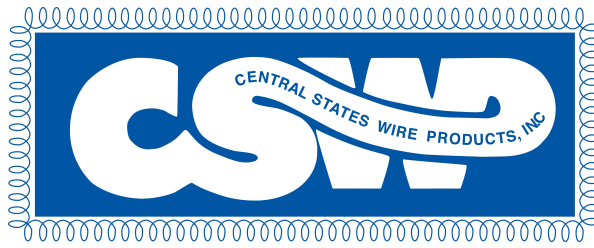

MODEL A482

PNEUMATIC PUSHER TYPE COMBINATION STEEL STRAPPING TOOL

Standard Features

This pneumatic combination pusher type strapping tool is perfect for mobile or stationary operations in the steel and non-ferrous industries. Its small base plate and low weight make it an ideal tool for mobile application of strapping on irregularly shaped objects.

Types of Model A482

Item No.	Model	Strap Width		Strap Thickness	
		mm	inch	mm	inch
13.4620	A482/19/0.80/ULT/7.0	19.0	3/4	0.80	.031

**Other models may be available upon request*

Specifications

Weight:	Without Suspension:	6.5 kg / 14.3 lbs.
	With Suspension:	7.0 kg / 15.4 lbs.
Suitable strap qualities:	25.0 - 32.0 mm / 1 1/4" wide	
	0.80 - 1.00 mm / .031 - .040" thick	
Tension:	up to 7000 N (1570 lbs) individual adjustment (Max. tension depends on strap quality)	
Suspension:	Universal suspension bracket is supplied with the tool	



A482-05/12-100448

CENTRAL STATES WIRE PRODUCTS, INC.

871 Edgerton St. * St. Paul, MN 55130 * 651-776-0404

WWW.CSWP.ORG