


The X-TRECH pre-stretch film carriage provides superior film economy, film tension and user safety.

The Robust PRO-GLIDE turntable support system is maintenance free and features superior weight capacity.

The advanced and user-friendly DIGI-TECH control unit features unique functions to wrap any type of pallet

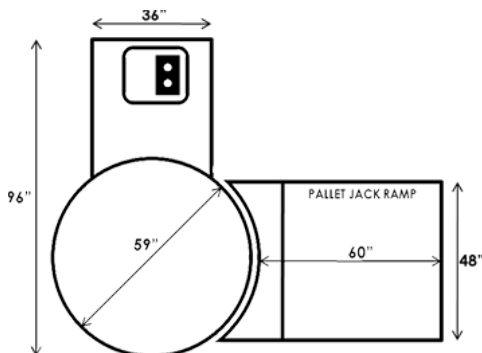

SONIC LPX

Low-Profile Semi-Automatic

- Uses 20" machine film
- Electronically adjustable film tension
- 250% film pre-stretch ratio, others available
- Maintenance free ball bearing carriage guide
- Automatic corner compensation
- Lifetime warranty on stretch rollers
- Structural steel frame
- Forklift portable
- Very low maintenance
- Easy access to components
- 1/2 HP turntable drive motor
- Heavy duty turntable chain drive
- Maintenance free turntable support casters
- Photo-eye automatic height detection
- Separate top and bottom wrap count 1-10
- Turntable soft start/stop
- Dual adjustable film carriage speed
- Reinforce wrap function
- Positive turntable home alignment
- Gentle cycle feature for light or unstable pallets

Technical Specifications

Turntable Speed	Adjustable up to 16 RPM
Control Type	Full-Feature Semi-Automatic
Max. Load Capacity	5,000 lbs
Max. Load Height	86"
Turntable Size	59" diameter
Turntable Height	3" from floor
Pre-Stretch Ratio	250% standard
Max. Load Size	56" x 56"
Turntable Height	9" from floor
Turntable Size	59" diameter
Electrical	115/1/60 15 amp
Warranty	3/5 year limited
Tower Height	85"
Clearance Required	97"

POPULAR OPTIONS

- Standard loading ramp for pallet jack
- Extended heavy duty ramp for electrical walkie
- Wrap height extension for taller pallets
- Frame extension for larger than standard pallets
- Turntable surround deck for pit mounting
- Scale package with digital weight indicator
- Auto film cut
- 70" diameter turntable