


The X-STRETCH pre-stretch film carriage provides superior film economy, film tension and user safety.

The Sonic RT features an all steel robust frame and the rotary tower support system requires very little maintenance.

The advanced and user-friendly DIGI-TECH control unit features unique functions to wrap any pallet type.

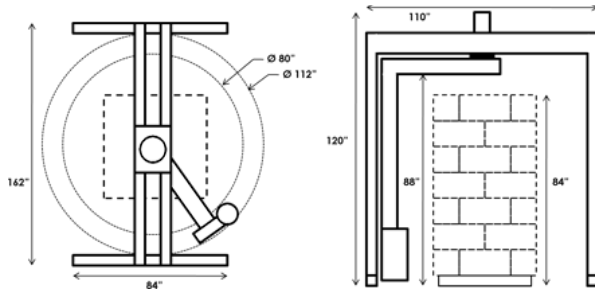

SONIC RTG

Semi-Automatic Rotary Arm

- Uses 20" machine film
- Electronically adjustable film tension
- 250% film pre-stretch ratio, others available
- Maintenance free ball bearing carriage guide
- Automatic corner compensation
- Lifetime warranty on stretch rollers
- Structural steel frame
- Lag down pole stand
- Very low maintenance
- Easy access to components
- 1/2 HP turntable drive motor
- Heavy duty rotary tower chain drive
- Heavy duty ring bearing arm support
- Photo-eye automatic height detection
- Separate top and bottom wrap count 1-10
- Rotary tower soft start/stop
- Dual adjustable film carriage speed
- Reinforce wrap function
- Safety photo-eye in front of rotary tower
- Automatic rotary tower home position

Technical Specifications

Turntable Speed	Adjustable up to 14 RPM
Control Type	Full-Feature Semi-Automatic
Max. Load Height	84"
Max. Load Diameter	76"
Pre-Stretch Ratio	250% standard
Max. Load Size	54" x 54"
Electrical	115/1/60 15amp
Warranty	3/5 year limited

POPULAR OPTIONS

- Wrap height extension for taller pallets
- C-Stand for floors unfit for lag down base
- Platform scale with digital weight indicator
- FDA approved Steel-It paint
- 30" film carriage
- Safety guarding around wrap zone